IP Link® Device Interface Communication Sheet

This document provides additional assistance with wiring your Extron IP Link enabled product to your device. Different components may require a different wiring scheme than those listed below.

For complete operating instructions, refer to the user's manual for the specific Extron IP Link enabled product or the controlled device manufacturer supplied documentation.

Device Specifications:

Device Type: Audio Processor
Manufacturer: Shure
Firmware Version: N/A
Model(s): DFR11EQ

Version History:

Driver Version	Date	IP Link Compiler	GC Version	Notes
1	7/21/2011	1.4.0	3.2.0	Initial version.

Driver Notes:

Control Commands & States:

Delay Samples*	0 – 9	Enter	Clear
Global Scene	1 – 10		
ID Select	0 – 15		
Local Scene	1 – 10		
Mute	On	Off	
Output Gain (Discrete)	-12 to 12 in steps of 1		

*To add Output Delay, enter the number of sample delays desired and press the Enter Command. To remove the delays press the Clear Command.

Status Available:

N / A

MLC62 Supported Commands:

Global Scene	1 – 10

IP Link® Device Interface Communication Sheet

Cable and Adapter Requirements:

M/F Null modem Cable

Notes for the Device:

Serial communication:

Port Type:	RS-232	**Parity:**	None
Baud Rate:	19200	**Stop Bits:**	1
Data Bits:	8	**Flow Control:**	None

Pin Assignments Diagram:

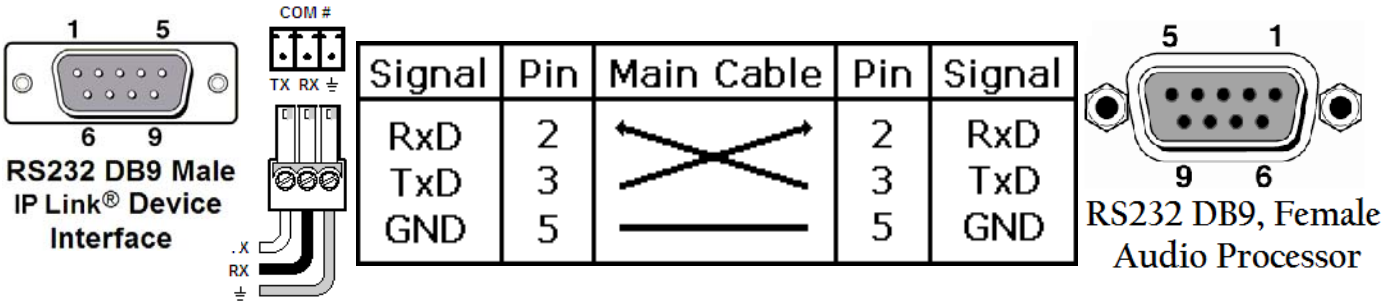

Note: Captive screw connector may also be used as a serial connection.

General Notes: